



Specification


Rated Power:7W Peak Power:14W
 Impedance:8Ω ±15%
 Resonant frequency / fs:105Hz±20%
 Voice Coil diameter: 19.32mm
 Sound Pressure: 82dB/1W /1M ±3dB at 500 to 3KHz.
 OD:68±0.5mm Thickness: 45.6±1mm
 Operation temperature: -20 to +60°C
 Operation: 5.29V (20Hz~5KHz 2.5Sec)
 Power Test:IEC268-5/7.48V/48hrs
 Weight:280g±10%

Subject to technical modification


Material

Magnet	Ferrite
Basket	Ferrite
Cone	Glass Fiber
Dust Cap	Paper

Drawing

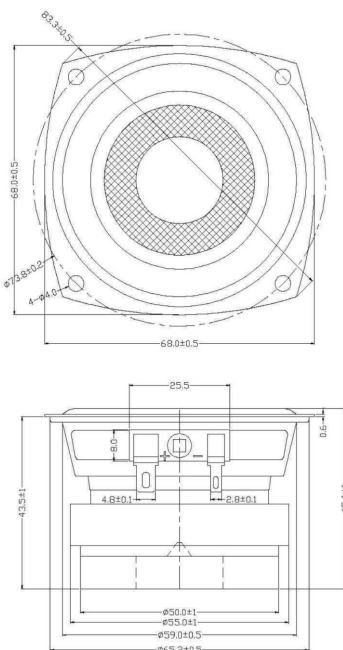

Impedance and frequency curve

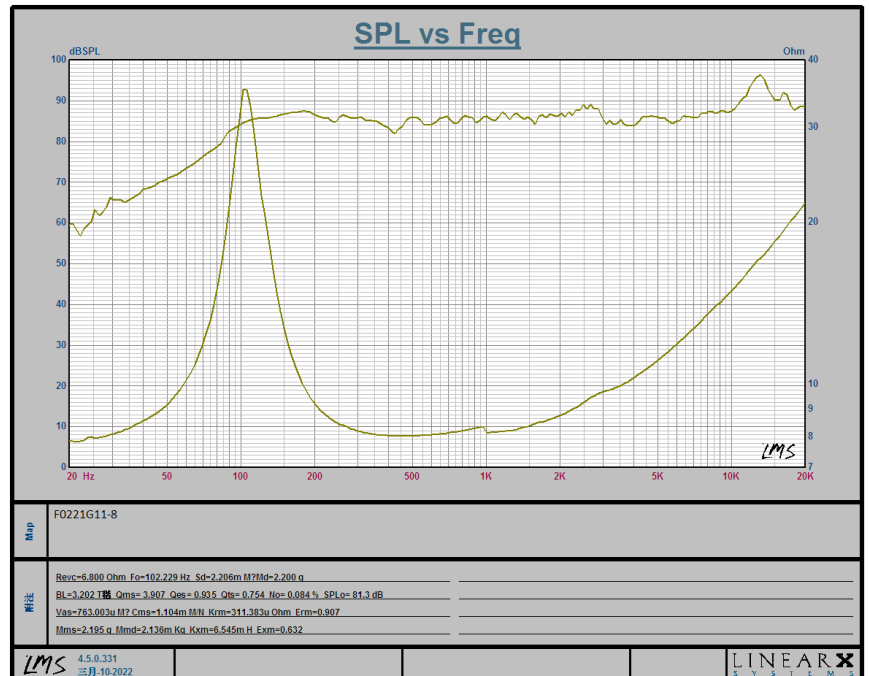

Main Parameter

Qts	0.754	Vas	0.763mm
Qms	3.907	Qes	1.039
Mms	2.195g	Cms	1.152mm/N
Xmax		BL	